



HOOD DETAIL

(SEE NOTE 5)

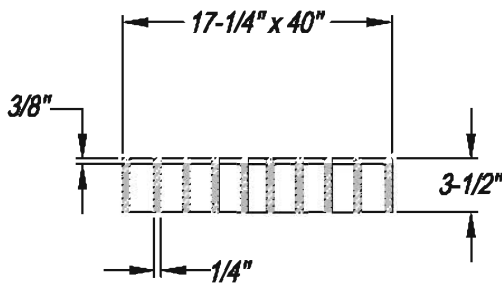

GRATE DETAIL

(SEE NOTE 7)




FRAME DETAIL

(SEE NOTE 6)

NOTES:

1. FRAME AND HOOD SHALL BE MANUFACTURED OF CAST IRON CONFORMING TO A.S.T.M. A-48 CLASS 35B.
2. FRAME, GRATE, AND HOOD SHALL BE H-20 RATED.
3. GRATE SHALL BE HOT-DIPPED GALVANIZED AND CHAINED TO FRAME.
4. FRAME AND HOOD SHALL BE COATED WITH BITUMINOUS MATERIAL CONFORMING TO A.W.W.A. C 203.
5. HOOD SHALL BE D&L FOUNDRY I-3541 OR APPROVED EQUAL.
6. FRAME SHALL BE D&L FOUNDRY I-3542 OR APPROVED EQUAL.
7. GRATE SHALL BE D&L FOUNDRY I-3543 HOT DIPPED GALVANIZED OR APPROVED EQUAL.



NO.	REVISED	BY	Frame and Grate Type 2 Curb Inlet Catch Basin	APPROVED	 CITY ENGINEER RCE-28191
				DATE: 2-2-99	
DRAWN BY: MCP				STANDARD NO. SD-7	
CHECKED BY: DJR					
<small>V: 125_City of Ripon Standards Standard Specifications Drawings Storm SD-7.dwg</small>			CITY OF RIPON		