

PLACEMENT OF SCHOOL AREA PAVEMENT LEGENDS

STOP: SHALL BE LOCATED IN EACH APPROACH LANE 8 FEET IN ADVANCE OF THE STOP LIMIT LINE OR CROSSWALK LINE. LEGEND SHALL BE THERMOPLASTIC, UNLESS APPROVED OTHERWISE, IN WRITING, BY THE CITY ENGINEER.

STOP AHEAD: SHALL BE LOCATED IN EACH APPROACH LANE. THE STOP LEGEND SHALL BE AT THE (W17) STOP AHEAD SIGN, AND THE AHEAD LEGEND SHALL BE LOCATED NEARER TO THE STOP LIMIT LINE PER TABLE "A". BOTH LEGENDS SHALL BE THERMOPLASTIC, UNLESS APPROVED OTHERWISE, IN WRITING, BY THE CITY ENGINEER.

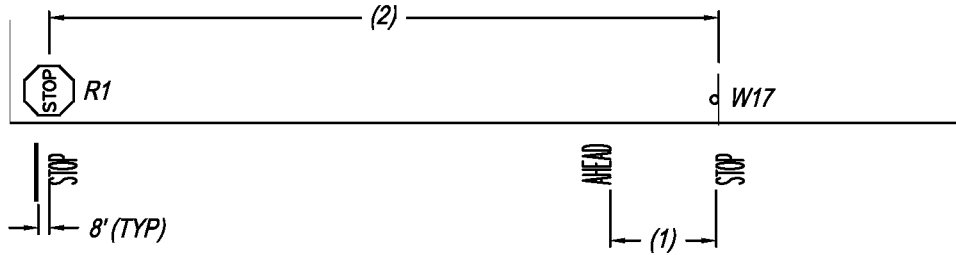


TABLE "A"

POSTED SPEED	SPACE BETWEEN LEGENDS (1)	SPACE BETWEEN R1 & W17 (2) *
25	32 FT	250 FT
30	40 FT	250 FT
35	48 FT	250 FT
40	56 FT	325 FT
45	64 FT	375 FT
50	72 FT	425 FT
55	80 FT	525 FT

* DISTANCES DERIVED FROM CALTRANS HIGHWAY DESIGN MANUAL TABLE 201.1

SLOW SCHOOL XING: SHALL BE LOCATED IN EACH APPROACH LANE WITH THE LEGEND XING LOCATED PER TABLE "B". LEGEND SHALL BE THERMOPLASTIC, UNLESS APPROVED OTHERWISE, IN WRITING, BY THE CITY ENGINEER.

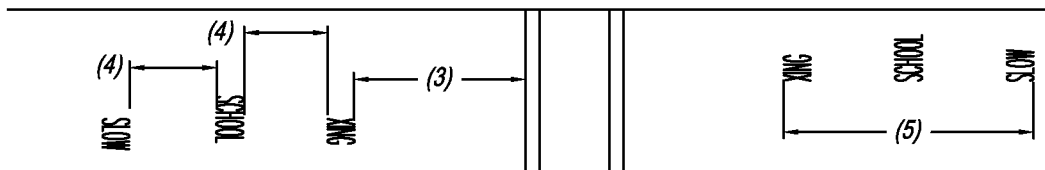


TABLE "B"

POSTED SPEED	DIST. FROM CROSSWALK (3)	SPACE BETWEEN LEGENDS (4)	OVERALL LEGEND LENGTH (5)
25	100 FT	32 FT	88 FT
30	150 FT	40 FT	104 FT
35	200 FT	48 FT	120 FT
40	260 FT	56 FT	136 FT
45	450 FT	64 FT	152 FT
50	500 FT	72 FT	168 FT
55	550 FT	80 FT	184 FT

NO.	REVISED	BY	<h2>School Area Pavement Legends</h2>	APPROVED	
				CITY ENGINEER	RCE-28191
DRAWN BY: MCP				DATE:	2-2-99
CHECKED BY: DJR				CITY OF RIPON	STANDARD NO. ST-18
V: 125 City of Ripon Standards Standard Specifications Drawings Streets st-18.dwg					