


FIBER ROLL


NOTES:
 A SINGLE RING OF PROTECTION
 USED WHEN CB/DI/INLET OR MANHOLE
 IS ON AN EXISTING HARD SURFACE, E.G.
 ROAD , CONCRETE ECT.; A DOUBLE RING
 OF PROTECTION SHALL BE USED WHEN
 CB/DI/MANHOLE IS LOCATED AND
 SURROUNDED BY EXISTING LOOSE
 GROUND/ EARTH.

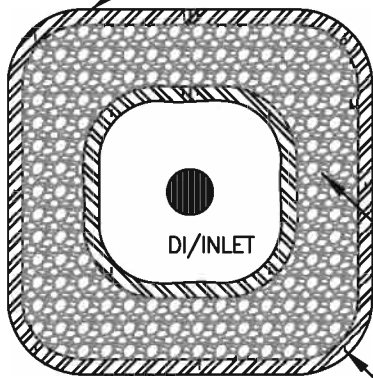

2" THK 3/4" A.B. (typ.)

SEE NOTES
 BELOW (TYP.)

STAKES PLACED AT CORNERS
 AND ENDS TO HOLD IN PLACE
 ON EXISTING GROUND.

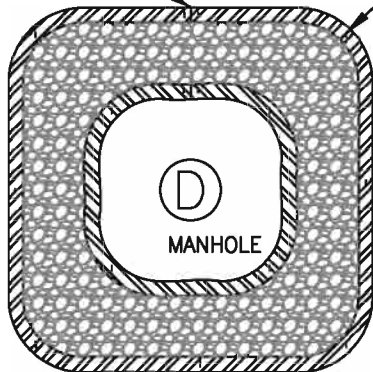

NOTES: FOLLOW MANUFACTURES SPECS ON JOINING AND APPLYING FIBER ROLLS,
 OTHERWISE USE THE ABOVE GUIDELINES. ENDS SHALL BE ABUTTED TOGETHER
 RATHER THEN OVERLAPPED.

SCALE: NONE

NO.	REVISED	BY	FIELD INLET / MANHOLE PROTECTION	APPROVED
				
				CITY ENGINEER 58093
DRAWN BY: AJM				DATE: 12-12-06
CHECKED BY:			CITY OF RIPON	STANDARD NO. SWPP-6
SCALE: NONE				