


1'-0" WIDE GROOVE STRIP
AND 1/2" BEVEL PER
CITY STD. ST-29 (TYP)

BRICK PAVERS INSTALLED PER
MANUFACTURERS RECOMMENDATIONS
SEE NOTE #2

PAVERS TO BE FLUSH WITH
GUTTER LIP AT RETURN (TYP)

SOLDIER COURSE

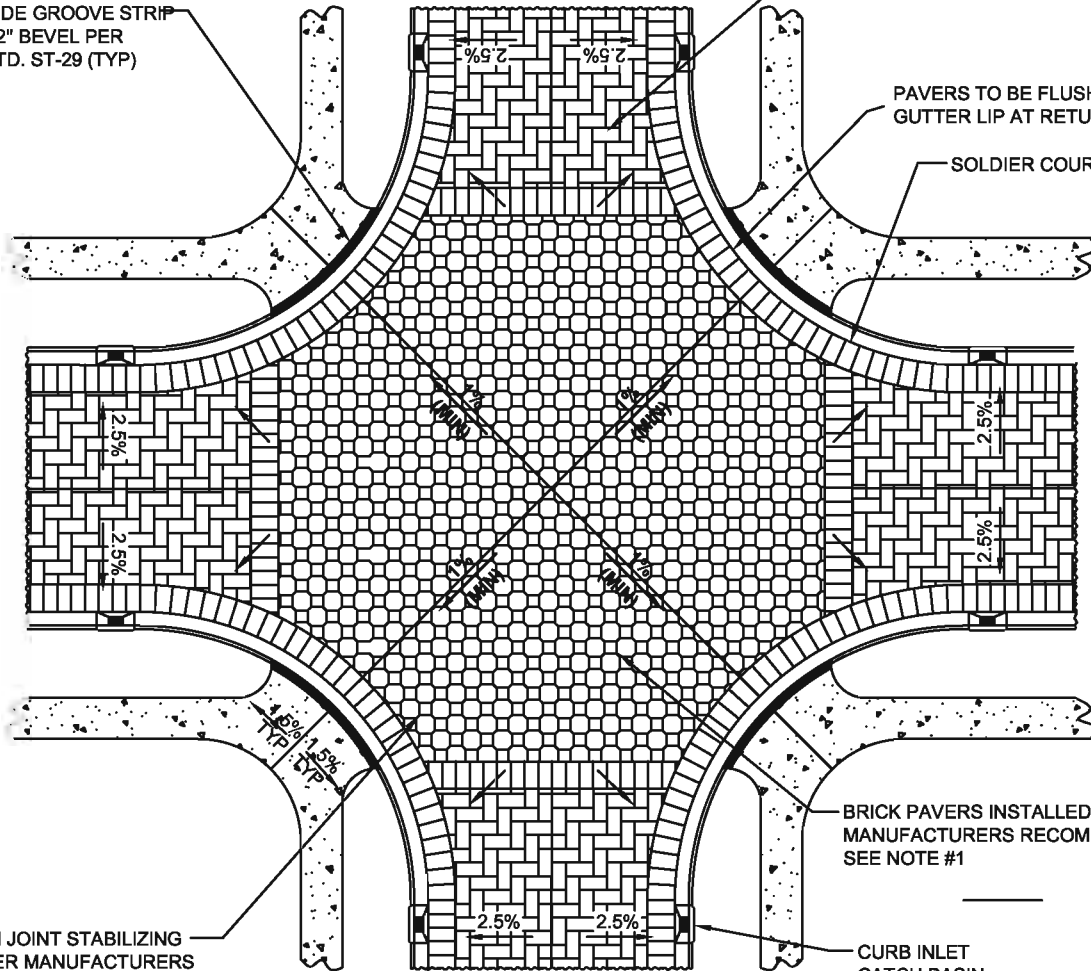

SEAL WITH JOINT STABILIZING
SEALER PER MANUFACTURERS
RECOMMENDATIONS

BRICK PAVERS INSTALLED PER
MANUFACTURERS RECOMMENDATIONS
SEE NOTE #1

CURB INLET
CATCH BASIN
(TYP)

SEE STANDARD NO. ST-30A
FOR RAISED INTERSECTION
SECTION VIEW

NOTES:

1. INTERIOR BRICK PAVERS:
MANUFACTURER: BASALITE (OR APPROVED EQUAL)
SIZE: 80 mm, 5.5" INTERLOCKING PAVERS
STYLE: SPECTRUM
COLOR: MENDOCINO
2. EXTERIOR BORDER PAVERS:
MANUFACTURER: BASALITE (OR APPROVED EQUAL)
SIZE: 80 mm, 3.15" BRICK PAVERS
STYLE: 90 DEGREE HERRINGBONE
COLOR: CHARCOAL TAN

NO.	REVISED	BY	Raised Paver Intersection Plan View Detail	APPROVED
1	11-28-05	ASV		<i>Matt MacEachron</i> CITY ENGINEER 58093
DRAWN BY: KWZ				DATE: 11-7-00
CHECKED BY:			CITY OF RIPON	STANDARD NO. ST-30
V:\25_City of Ripon Standards\Standard Specifications\Drawings\Streets\st-30.dwg				