


NOTE: ALL FOUR WAY INTERSECTIONS REQUIRE RAISED INTERSECTIONS

RAISED INTERSECTION


NOTE: SELECT OPTION WITH CITY APPROVAL

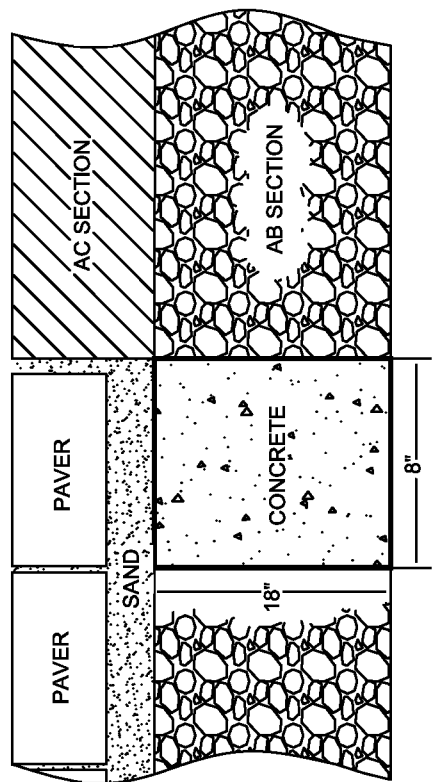

(TYP) 18" x 8" CONCRETE BLOCK

SUBMERGED CONCRETE EDGE

NOTE: SELECT OPTION WITH CITY APPROVAL

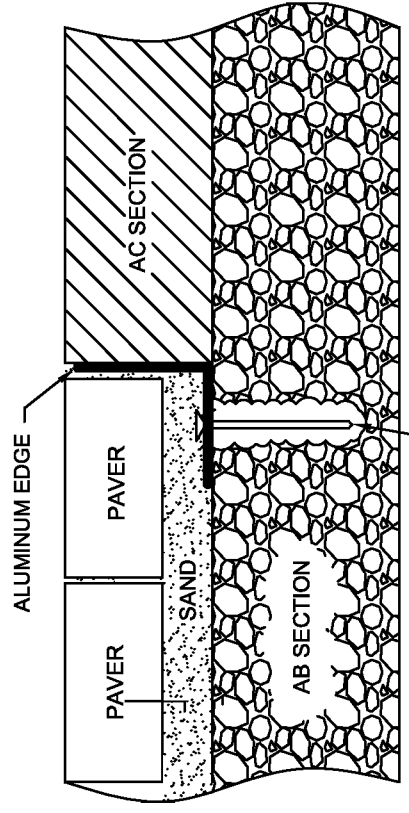

USE 3/8" x 10" SPIRAL STEEL SPIKES SPACING THEM MAXIMUM OF 12" ON CENTER

ANCHORED ALUMINUM EDGE

NO.	REVISED	BY
DRAWN BY: ASV		
CHECKED BY:		
V:\25_City of Ripon Standards\Standard Specifications\Drawings\Streets\st-30a.dwg		

Raised Intersection | Paver Transition Section View Detail

APPROVED

Matt MacDade

CITY ENGINEER 58093

DATE: 11-7-00

STANDARD NO. **ST-30a**